

) NPX4800

) netPIX™
EYEVIS CONTROLLER

) PRODUCT DESCRIPTION

netpix 4800 is a network based graphic controller for the management of video wall systems, single displays or projectors. Through its MultiScreen-ability any display surfaces can be realized. The controller creates a big joined desktop for network-applications, video and graphic sources. At the heart of the NPX-4800 works the powerful SBC in combination with the backplane with switch fabric. The new NPX-4800 Controller offers an ultra high performance bus, cost-effective INTEL® XEON® CPUs, 64Bit technology and high bandwidth trough a Switch Fabric BUS with 192GB/s. These new technologies guarantee the revolutionary and powerful performance of the next generation of the NPX Family in any control room application.


The NPX-4800 provides multiple analog and digital video and graphic connectivity with input cards. Through the new Switch Fabric architecture, video and graphic sources can be displayed simultaneously on the display wall in full frame rates. All analog and digital Video-/RGB-/DVI- and IP Streaming data is transmitted with up to 192GByte/s without any dependencies on the system.

) ADVANTAGES OF THE NEW NPX4800 SERIES

-) Expandable for future system upgrades
-) Powerfull system components
-) Higher performance



) SYSTEM OVERVIEW

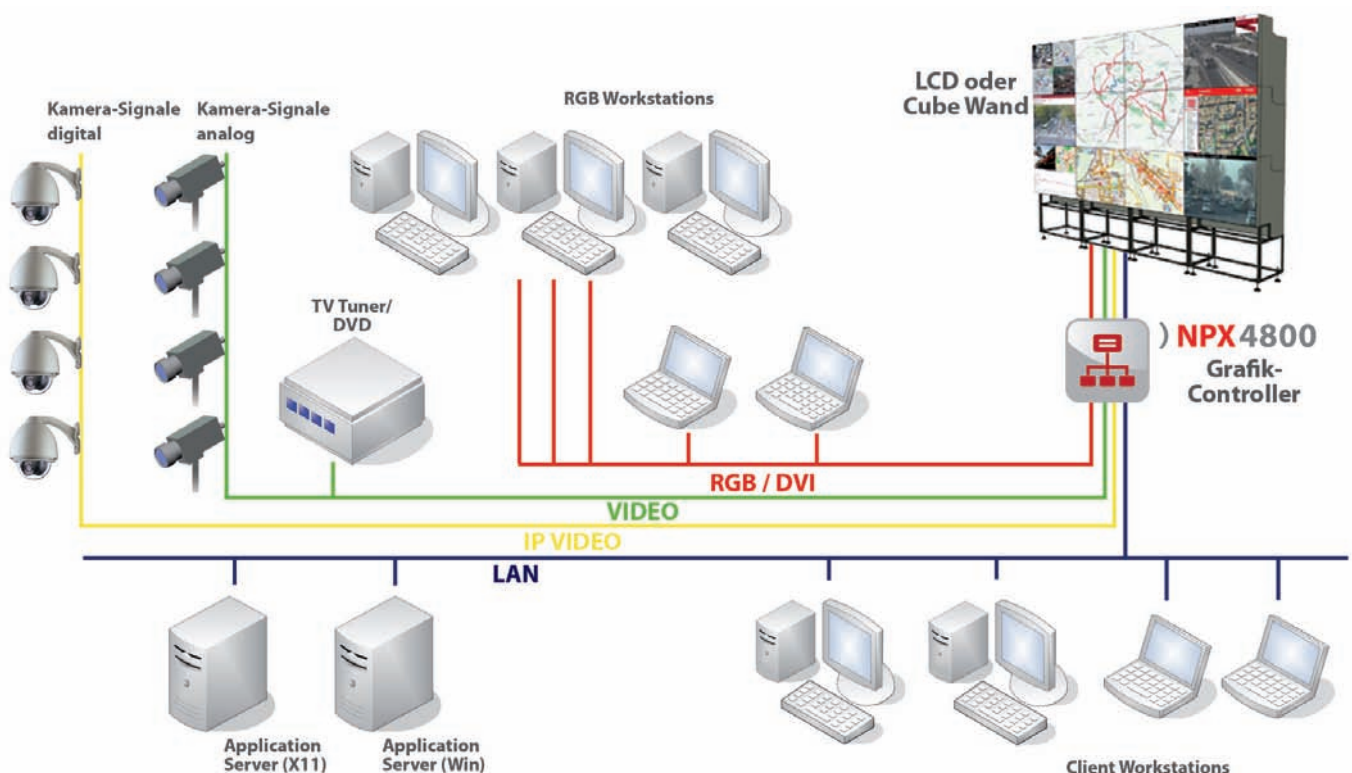

) NPX4800



Network-based Graphics Controller

) SYSTEM ARCHITECTURE

The NPX4800 controller relies on a CPU unit and up to 4 expansion chassis. This technology is based on the Intel® XEON® Quad Core® Technology. This new CPU generation provides better performance for the display of high-end visualisation applications compared to other systems

-) QUAD CORE Intel Xeon Prozessor up to 3,3 GHz (optionally 12 Cores)
-) High-end server components for highest availability
-) 8GB DDR3 ECC RAM (expandable up to 64GB)
-) DUAL Gigabit Ethernet



) SYSTEM AVAILABILITY

-) Redundant power supply units, hot swappable
-) Redundant SATA Solid State Disk with RAID1, hot swappable
-) Windows Disk Imaging and Disaster Recovery, in the event of a system or disk crash, security attack or other fatal failure you can restore your entire controller within minutes - no reinstallation is required.
-) The NPX 4800 is built in accordance with eyevis ISO 9001 registered facility to meet the specific requirements of each customer and is the best controller for standard control rooms with high availability.




) DESKTOPMANAGEMENT & OPERATING SYSTEM

-) Because of its MultiScreen-ability, any data and application can be displayed simultaneously; they can also be positioned and resized freely. The operator has a big desktop with a very high resolution at his disposal, which will be multiplied by the size of the wall.
-) Windows® XP PRO 32/64 Bit and WIN2003+2008 Server support as well Windows 7 32/64Bit
-) Up to 64GB RAM inside the systems reserved for RAM intensive applications
-) Huge Windows desktop with up to 32000x32000 pixel depending on the size of the system
-) Standard Windows® & X11 applications (optional) and SCADA software can be displayed on the wall with no restriction.
-) Windows®-based applications can be displayed simultaneously with any other input signals like video, IP-video and RGB/DVI.



) BUS SYSTEM

The core of the system is the ultra-fast PCIe Switch Fabric with PCIe X4 slots and a total bandwidth of 192GB/s for transmitting Windows® information, network data, video, digital streams and graphic signals to each output card. This guarantees a very high bandwidth without decreasing frame rates when numerous inputs are displayed simultaneously

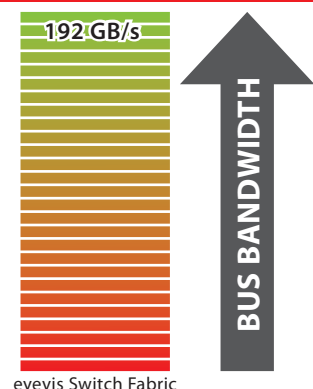

) NPX4800



Network-based Graphics Controller

) INPUT SIGNAL PROCESSING



The NPX4800 controller can be equipped with various input cards for video, RGB/DVI-HDSDI and IP signals. All input signals windows can be moved, scaled and placed freely on the display wall.

-) The input cards provide state-of-the-art video processing resulting in superb quality
-) Huge number of cards per system possible
-) Easy to upgrade for future system expansion

Analog Video Input Board

-) Up to 128 video signals in one system
-) Up to 32 video windows can be displayed with every display output
-) Composite BNC or S-Video (Y/C)

IP Decoder Board

-) Up to 512 video signals in one system
-) Simultaneous decoding of up to 32 channels in D1 resolution per IP-decoder board
-) Simultaneous decoding of up to 16 channels in full HD resolution per IP-decoder board
-) Supports MPEG2, MPEG4, H264

RGB / DVI Inputs

-) Display of the source output in freely moveable, scalable and placeable windows on the display wall
-) Up to 40 RGB/DVI input sources
-) Input Signals:
 - DVI Single Link up to 1920x1200
 - DVI Dual Link up to 2560x1600
 - Analog up to 2048x1536

SDI Inputs

-) Display of the source output in freely moveable, scalable and placeable windows on the display wall
-) Up to 20 SDI inputs
-) Video Modes: SD-SDI (480i/576i), HD-SDI (up to 1080i), 3G-SDI (up to 1080p) & 2k digital cinema modes

) OUTPUT GRAPHICS PROCESSING



The new 128Bit GPU has 128MB per output channel achieves a never seen graphic performance

-) Analog and digital outputs up to 1920x1200 pixels and HD Format
-) Configurations up to 36 Output channels
-) Multiple resolution modes for different output resolutions at the same time, for rectangle or none-rectangle display configurations*
-) Live preview support for each source connected with the eyecon wall management software
-) Underlapping mode for narrow bezel displays*
-) Overlapping mode for edge overlapping projections*
-) Pivot mode for landscape and portrait display*

*) non-standard modes, available on request

) WALL MANAGEMENT SOFTWARE



For an easy management of large screen displays, we recommend to combine the eyecon wall management software with the netpix controller. With this software, especially developed for large screen displays, the user has nearly unlimited possibilities for the management and operation of his display wall.

) NPX4800



Network-based Graphics Controller

) TECHNICAL SPECIFICATIONS

NPX4800-CPU (Art. No. 13981)

Processor:	Up to two Intel® 64-bit XEON® Processors Quad Core Intel® Xeon® Prozessor E5606 with 2,13 GHz (optionally up to 12 core with 3,3 GHz)
Chipset:	Dual Intel® 5520 (Tylersburg) Chipsets
RAM:	8GB DDR3 ECC RAM (expandable up to 64GB)
Expansion Slots:	7 x PCIe Express X8
Hard Disk:	SATA 3.0Gbps, HotSwap 180GB, SSD (optional: 180 GB, RAID1 HotSwap, optionally expandable up to 1 TB)
DVD-RW drive:	reading speed: DVD: 16x / CD: 48x max write speed: DVD-R: 24x / DVD+R: 24x / DVD-RW: 6x / DVD+RW: 8x / DVD-R DL: 12x / DVD+R9: 12x / CD-R: 48x / CD-RW: 32x
Ethernet:	2 x 10/100/1000 Mbps RJ45 Ports standard integrated
Dimensions (WxHxD):	42,35 cm x 17,7 cm x 67,0 cm
Weight:	26,5 kg
Operating Conditions:	Temperature: 0°C - 40°C (32°F - 104°F) / Humidity: 10 - 90% not condensing / Altitude: up to 3.048 m (10.000 ft)
Power Supply:	100-240 V, 50-60Hz, 800 Watt, optional: redundant, HotSwap
Operating System:	Windows® XP PRO 32/64Bit Edition, Win2003+2008 Server 32/64Bit, Windows 7 32/64Bit
Accessories (optional):	104-key keyboard, 2-key-wheel/button-Mouse, optionally with extension cable up to 50m, DVI cable für eyevis Cubes (fibreglass) for distances up to 100m

Hardware Expansion NPX4800-EXP (Art. No. 14005)

Expansion Slots:	8x PCIe Express X4 1x PCIe Express X8 (up to 33 with further extension boxes)
BUS:	Switch Fabric with max. Bandwidth to 192GB/s
Dimensions (WxHxD):	43,0 cm x 17,7 cm x 52,3 cm
Weight:	26,5 kg
Operating Conditions:	Temperature: 0°C - 40°C (32°F - 104°F) / Humidity: 10 - 90% not condensing / Altitude: up to 3.048,0m (10.000 ft)
Power Supply:	100-240 V, 50-60Hz, redundant HotSwap 620Watt

Graphic Board NPX4800-GB4 (Art. No. 13986)

Graphic Memory:	512MB per card
Wall Configuration:	Any rectangular or non-rectangular array up to 36 display modules
Resolution:	640x480 up to 1920x1200 and HDTV 1080p per Output
Colour Depth:	16/32 Bit
Output Signal:	DVI-I Connector (analog and digital) optional: VGA to DVI-I adapter

Video Input Card NPX4800-VID8 (Art. No. 13983)

Inputs:	8 x Composite oder S-Video BNC Connectors
Input format:	NTSC, PAL, SECAM
Decoder:	High-Quality Video Decoder mit De-interlacing
Scaling & Display:	Display of multiple video sources in any size, everywhere on the wall. Control of colour, brightness, contrast.

DVI Input Card NPX4800-DVI2 (Art. No. 16373)

Inputs:	2 x DVI-I / HD15	DVI Input Card NPX4800-DDVI1 (Art. No. 16329)	1 x DVI-D Dual Link
Signal Processing:	RGB/DVI with full Refresh; integrated Scaler		DVI with full Refresh; integrated Scaler
Format:	RGB with separate Syncs for H and V, DVI-I		DVI-D
Resolution:	Up to 1920x1200 Pixels		Up to 2560x1600 Pixels (330MHz)
Pixel Format:	16Bit/32Bit, YUV422, RGB 8:8:8		16Bit/32Bit, YUV422, RGB 8:8:8
Scaling & Display:	Display of multiple sources of any size, everywhere on the video wall		Display of multiple sources of any size, everywhere on the video wall

Video Input Card NPX4800-SDI2 (Art. No. 16242)

Inputs:	2 x SDI BNC Connectors with Loop-Through Capability
Input Format:	SD-SDI (480i/576i), HD-SDI (up to 1080i), 3G-SDI (up to 1080p), 2k Digital Cinema Mode
Pixel Format:	RGB: 5-5-5, 5-6-5 oder 8-8-8 (24bit/ 32bit) Pixel
Maximum SDI bit rate :	64MB per channel (total 128MB)
Scaling & Display:	Display of multiple video sources in any size, everywhere on the wall. Control of colour, brightness, contrast.

IP Decoder NPX4800-IPD32-1 (Art. No. 18224)

Decoder:	32x D1 Decoder oder 16x HD 1080p Decoder
LAN:	Standard integriert 10/100/1000 Mbps RJ45 Ports
Format:	H264, MPEG2, MPEG4
Resolution:	QCIF up to Megapixels
Framerates:	25/30 Frames per channel
Dimensions (WxHxD):	48,4 x 8,9 x 50,0 cm (incl. rack handles)
Weight:	10,5 kg



eyevis GmbH

Hundsschleestr. 23 • 72766 Reutlingen • Germany

Phone: + 49 (0) 7121 43303 - 0 • Fax: + 49 (0) 7121 43303 - 22

www.eyevis.de • info@eyevis.de

As at: 17.01.2013/V1.0 • Subject to change!

All trademarks and registered trademarks are the property of their respective owners. Copyright © 2013 eyevis GmbH. All rights reserved.